

14.07.04



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 26 JUL 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03101908.6

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



PC1/EP200 4 / 0 5 1 1 5 2

Europäisches
PatentamtEuropean
Patent OfficeOffice européen
des brevets

14.07.04

Anmeldung Nr:
Application no.: 03101908.6
Demande no:

Anmeldetag:
Date of filing: 26.06.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Federal-Mogul S.A.
Avenue Champion
6790 Aubange
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Windscreen wiper device

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

B60S1/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

Bemerkungen:

Remarks:

Remarques:

See page 1 of the description for the original title

Q.2AE90

**WINDSCREEN WIPER DEVICE COMPRISING AN ELASTIC, ELONGATED
CARRIER ELEMENT, AS WELL AS AN ELONGATED WIPER BLADE OF A
5 FLEXIBLE MATERIAL, WHICH CAN BE PLACED IN ABUTMENT WITH THE
WINDSCREEN TO BE WIPED**

The invention relates to a windscreen wiper device
comprising an elastic, elongated carrier element, as well
10 as an elongated wiper blade of a flexible material, which
can be placed in abutment with a windscreen to be wiped,
which wiper blade includes opposing longitudinal grooves on
its longitudinal sides, in which grooves spaced-apart
longitudinal strips of the carrier element are disposed,
15 wherein neighbouring ends of said longitudinal strips are
interconnected by a respective connecting piece, which
windscreen wiper device comprises a connecting device for
an oscillating wiper arm.

20 Such a windscreen wiper device is generally known. The
prior art windscreen wiper device is in particular designed
as a "yokeless" wiper device, wherein use is no longer made
of several yokes pivotally connected to each other, but
wherein the wiper blade is biased by the carrier element,
25 as a result of which it exhibits a specific curvature. The
oscillating arm of the prior art windscreen wiper device
comprises a projecting pin on one side thereof, which is
inserted sideways into a through hole of the connecting
device.

30

One drawback of the prior art windscreen wiper device is
the fact that the neighbouring ends of the longitudinal
strips and the connecting pieces (in practice also called
"end caps") are not connected in a durable, solid manner.

Particularly, as the reliability of said connection diminishes with the passage of time, the connecting pieces may come loose from said strips. As a result of said poor connection, the life span of the prior art windscreen wiper
5 device is seriously shortened.

The object of the invention is to overcome the drawbacks of the prior art as indicated above, in particular to provide a windscreen wiper device wherein the longitudinal strips
10 and the connecting pieces ("end caps") are interconnected in a durable, solid manner.

In order to accomplish that objective, a windscreen wiper device of the kind referred to in the introduction is
15 characterized in that at least one connecting piece comprises engaging members engaging around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members, wherein said strips and said
20 connecting piece are slidably connected by means of a snap connection. By sliding said connecting piece over the neighbouring ends of said strips -or vice versa, that is by sliding the neighbouring ends of said strips into said
connecting piece- a reliable snap connection between these
25 parts is realized. The snap connection particularly comprises a hole or an aperture and a protrusion cooperating together.

In one preferred embodiment of a windscreen wiper device in accordance with the invention, the snap connection
30 comprises laterally extending means on said strips. Preferably, said laterally extending means comprise at

least one protrusion extending laterally from a longitudinal edge of each strip, said protrusion being located between stops on the connecting piece. In another preferred version, said laterally extending means comprise at least two stops extending laterally from a longitudinal edge of each strip, said stops being located on opposite sides of a protrusion on the connecting piece.

10 In another preferred embodiment of a windscreen wiper device according to the invention, said laterally extending means extend laterally from the interior longitudinal edge of each strip. In the alternative, said laterally extending means extend laterally from the exterior longitudinal edge of each strip.

In another preferred embodiment of a windscreen wiper device in accordance with the invention, the engaging members are integral with said connecting piece. The connecting piece is particularly made in one piece of plastic.

25 In another preferred embodiment of a windscreen wiper device according to the invention, said connecting piece is provided with an opening at its free end so that the wiper blade can freely slide through said connecting piece. In other words, the connecting pieces ("end caps") do not retain the wiper blade, so that said connecting pieces allow a relative movement of the wiper blade along the longitudinal strips in the connecting pieces, thus improving the wiping properties of the

present windscreen wiper device.

In another preferred embodiment of a windscreen wiper device in accordance with the invention, a spoiler is provided and wherein an end of said spoiler is mounted in said connecting piece. The spoiler is preferably a separate constructional element being entirely detachably connected to the wiper blade, wherein the connecting piece can be slid over said spoiler end.

The invention furthermore relates to a method for manufacturing a windscreen wiper device according to the invention, wherein opposing longitudinal grooves are formed in the longitudinal sides of an elongated wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, in which grooves longitudinal strips of a carrier element are subsequently fitted in spaced-apart relationship, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, wherein a connecting device is provided for an oscillating wiper arm, characterized in that said strips and at least one connecting piece are slidably connected by means of a snap connection, wherein engaging members of said connecting piece engage around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members.

The invention will now be explained in more detail with reference to figures illustrated in a drawing, wherein:

- Figure 1 is a perspective, schematic view of a

preferred embodiment of a windscreen wiper device according to the invention;

- Figures 2 through 6 show details of the windscreen wiper device of Figure 1.

5

Figure 1 shows a preferred variant of a windscreen wiper device 1 according to the invention. Said windscreen wiper device is built up of an elastomeric wiper blade 2, in the longitudinal sides of which opposing longitudinal grooves 3 are formed, and of longitudinal strips 4 made of spring band steel, which are fitted in said longitudinal grooves 3. Said strips 4 form a flexible carrier element for the rubber wiper blade 2, as it were, which is thus biased in a curved position (the curvature in operative position being that of a windscreen to be wiped). Neighbouring ends 5 of strips 4 are interconnected on either side of the windscreen wiper device 1 by means of connecting pieces 6. The windscreen wiper device 1 is further equipped with a connecting device 7 for an oscillating arm 8, and a spoiler 9.

Figure 2 shows a free end of the windscreen wiper device 1 of figure 1, whereas figure 3 reveals a bottom view of said free end without the wiper blade 2 being present. Corresponding parts have been designated with the same reference numerals. As can be seen from figures 2, 4 and 5 (the latter two figures showing in perspective the connecting piece 6 as a separate constructional element), the connecting piece 6 is provided with an opening 10 in order to allow a relative movement of the

wiper blade 2 along the strips 4 inside the connecting piece 6, so that said connecting piece 6 does not block the wiper blade 2 during use. The connecting pieces 6 are made of one piece of plastic.

5

With reference to figure 6 relating to a top view of the strips 4 as such, said strips 4 are each provided with a protrusion 11 extending laterally from a longitudinal interior edge 12 of the strips 4. When a connecting
10 piece 6 is slidably mounted onto the neighbouring ends 5 of the strips 4, a snap or clicking connection is realized, wherein the protrusions 11 are snapped or clicked between stops 13 ("notches 13") inside the connecting piece 6. Each protrusion 11 rests in a small
15 groove 14 between these opposing stops 13. Accordingly, the strips 4 are blocked against any movement in longitudinal direction with respect to the connecting pieces 6. Each connecting piece 6 is also provided with two engaging members 15 made integral therewith, wherein
20 said engaging members 15 engage around the strips 4 so as to form a groove 16 for sliding the strips 4 therein. Said engaging members 15 ensure that the strips 4 are blocked against any movement in transversal direction with respect to the connecting pieces 6. Each connecting
25 piece 6 has a cavity 17 to accomodate the free end of the spoiler 9.

The stop 13 facing away from the free end of the connecting piece 6 is equipped with an inclined upper
30 surface, so that sliding said connecting piece 6 onto the strips 4 does not take too much force, whereas once

the protrusion 11 rests inside said groove 14
dismounting the connecting piece 6 from the strips 4
cannot take place easily. The stop 13 facing towards the
free end of the connecting piece 6 also ensures that the
5 strips are kept at a mutual constant distance, as the
upper end of each strip 4 is located between said stop
13 and a (side) wall of the connecting piece 6.

10 The present invention is not limited to the embodiment
shown, but extends also to other embodiments falling
within the scope of the appended claims.

CLAIMS

1. A windscreen wiper device comprising an elastic,
5 elongated carrier element, as well as an elongated
wiper blade of a flexible material, which can be
placed in abutment with a windscreen to be wiped,
which wiper blade includes opposing longitudinal
10 grooves on its longitudinal sides, in which grooves
spaced-apart longitudinal strips of the carrier
element are disposed, wherein neighbouring ends of
said longitudinal strips are interconnected by a
respective connecting piece, which windscreen wiper
15 device comprises a connecting device for an
oscillating wiper arm, characterized in that at
least one connecting piece comprises engaging
members engaging around the longitudinal strips so
that said strips are mounted in grooves formed by
said engaging members, wherein said strips and said
20 connecting piece are slidably connected by means of
a snap connection.
2. A windscreen wiper device according to claim 1,
25 wherein the snap connection comprises laterally
extending means on said strips.
3. A windscreen wiper device according to claim 2,
30 wherein said laterally extending means comprise at
least one protrusion extending laterally from a
longitudinal edge of each strip, said protrusion
being located between stops on the connecting piece.

4. A windscreen wiper device according to claim 2 or 3,
wherein said laterally extending means comprise at
least two stops extending laterally from a
longitudinal edge of each strip, said stops being
located on opposite sides of a protrusion on the
connecting piece.
5. A windscreen wiper device according to any of the
preceding claims 2 through 4, wherein said laterally
extending means extend laterally from the interior
longitudinal edge of each strip.
6. A windscreen wiper device according to any of the
preceding claims 2 through 5, wherein said laterally
extending means extend laterally from the exterior
longitudinal edge of each strip.
7. A windscreen wiper device according to any of the
preceding claims 1 through 6, wherein the engaging
members are integral with said connecting piece.
8. A windscreen wiper device according to any of the
preceding claims 1 through 7, wherein said
connecting piece is provided with an opening at its
free end so that the wiper blade can freely slide
through said connecting piece.
9. A windscreen wiper device according to any of the
preceding claims 1 through 8, wherein a spoiler is
provided and wherein an end of said spoiler is
mounted in said connecting piece.

10. Method for manufacturing a windscreen wiper device according to any of the preceding claims 1 through 9, wherein opposing longitudinal grooves are formed in the longitudinal sides of an elongate wiper blade of a flexible material, which can be placed in abutment with a windscreen to be wiped, in which grooves longitudinal strips of a carrier element are subsequently fitted in spaced-apart relationship, wherein neighbouring ends of said longitudinal strips are interconnected by a respective connecting piece, wherein a connecting device is provided for an oscillating wiper arm, characterized in that said strips and at least one connecting piece are slidably connected by means of a snap connection, wherein engaging members of said connecting piece engage around the longitudinal strips so that said strips are mounted in grooves formed by said engaging members.

ABSTRACT

A windscreen wiper device comprising an elastic,
elongated carrier element, as well as an elongated wiper
5 blade of a flexible material, which can be placed in
abutment with a windscreen to be wiped, which wiper
blade includes opposing longitudinal grooves on its
longitudinal sides, in which grooves spaced-apart
longitudinal strips of the carrier element are disposed,
10 wherein neighbouring ends of said longitudinal strips
are interconnected by a respective connecting piece,
which windscreen wiper device comprises a connecting
device for an oscillating wiper arm, with the special
feature that at least one connecting piece comprises
15 engaging members engaging around the longitudinal strips
so that said strips are mounted in grooves formed by
said engaging members, wherein said strips and said
connecting piece are slidably connected by means of a
snap connection.



FIG. 1

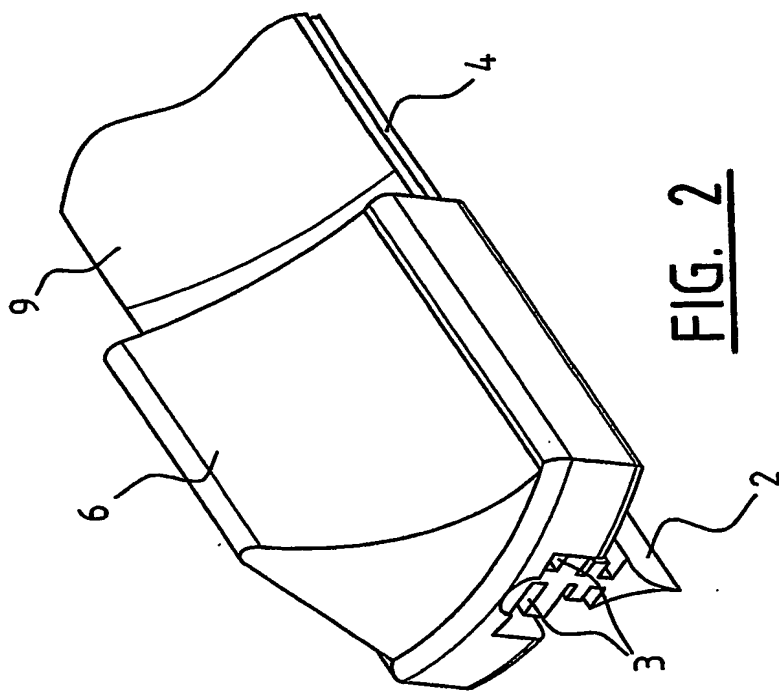


FIG. 2




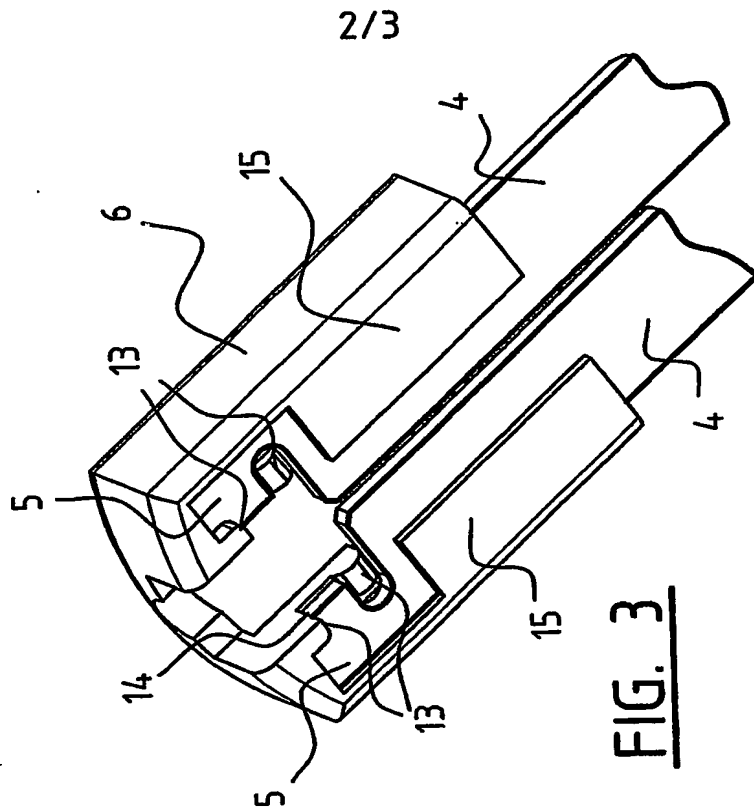


FIG. 3

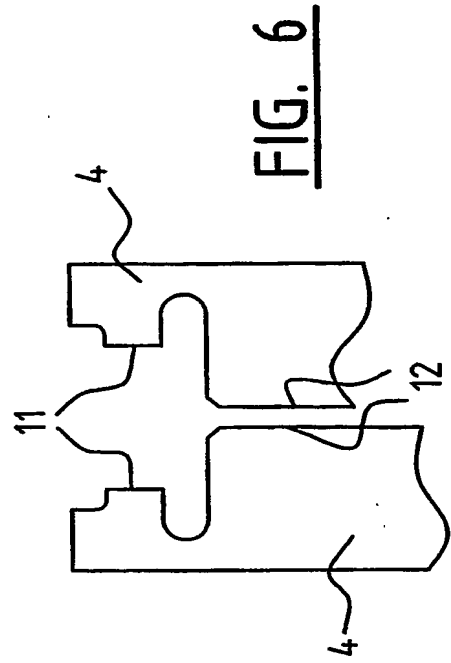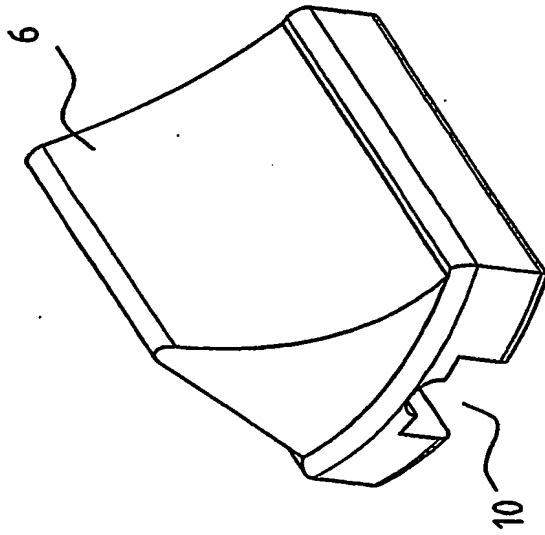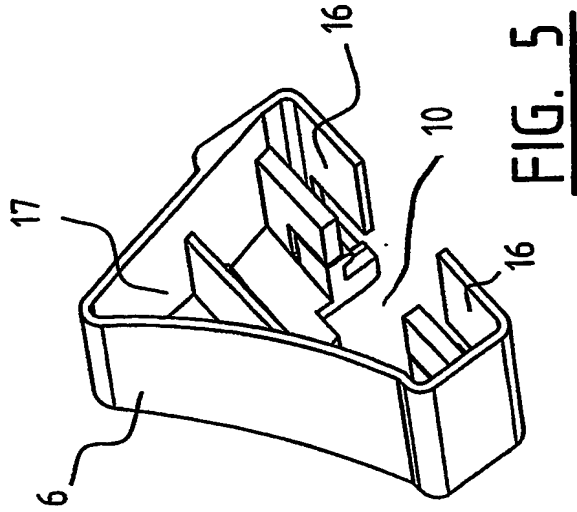

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☒ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.